



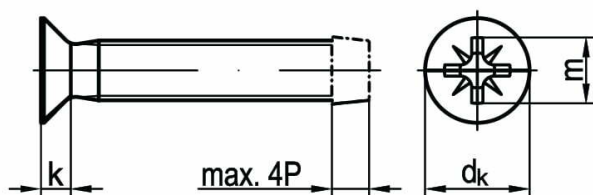

## Cross recessed countersunk head screws DIN 965

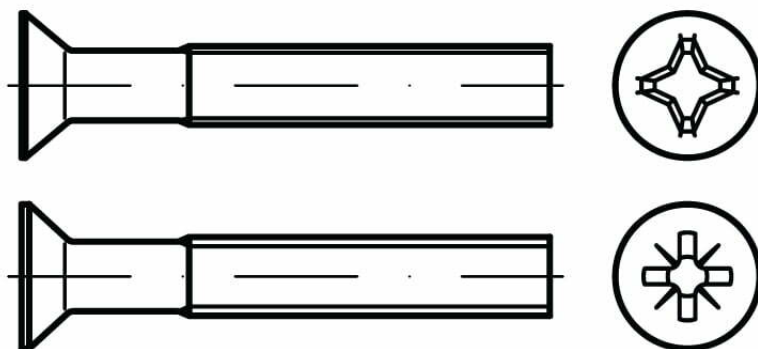

| STANDARD                        | MATERIAL                  | CLASS | COATING         |
|---------------------------------|---------------------------|-------|-----------------|
| DIN 965<br>PN 82208<br>ISO 7046 | seel<br>A2<br>A4<br>brass | 4,8   | galvanized zinc |

| d                           | M1,6 | M2  | M2,5 | M3   | M3,5 | M4  | M5  | M6   | M8   | M10 |
|-----------------------------|------|-----|------|------|------|-----|-----|------|------|-----|
| $d_k$<br><small>max</small> | 3,0  | 3,8 | 4,7  | 5,6  | 6,5  | 7,5 | 9,2 | 11,0 | 14,5 | 18  |
| $k_{max}$                   | 0,96 | 1,2 | 1,5  | 1,65 | 1,93 | 2,2 | 2,5 | 3    | 4    | 5   |