



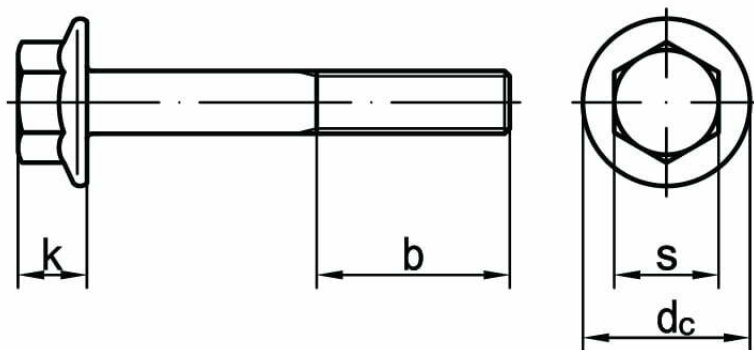

## Hex head flanged bolts DIN 6921

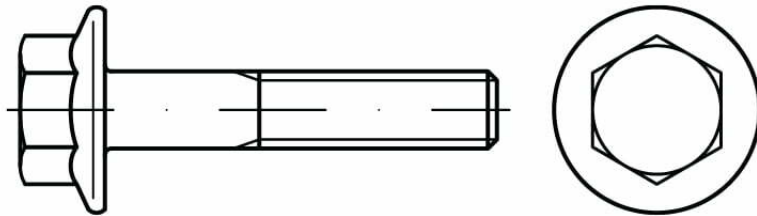

| STANDARD             | MATERIAL        | CLASS       | COATING                                                                                                                 |
|----------------------|-----------------|-------------|-------------------------------------------------------------------------------------------------------------------------|
| DIN 6921<br>PN 82247 | Steel<br>A2, A4 | 8.8<br>10.9 | galvanized zinc<br>hot-dip galvanized zinc<br>thermo-diffusion zinc coating<br>lamellar coatings (flake)<br>zinc-nickel |

| d                   | M5   | M6   | M8  | M10  | M12  | M14  | M16  | M20  |
|---------------------|------|------|-----|------|------|------|------|------|
| b l<125             | 16   | 18   | 22  | 26   | 30   | 34   | 38   | 46   |
| b 125< l <200       | –    | –    | 28  | 32   | 36   | 40   | 44   | 52   |
| b l>200             | –    | –    | –   | –    | –    | –    | 57   | 65   |
| k <sub>DINISO</sub> | 5,4  | 6,6  | 8,1 | 9,2  | 11,5 | 12,8 | 14,4 | 17,1 |
| d <sub>DINISO</sub> | 11,8 | 14,2 | 18  | 22,3 | 26,6 | 30,5 | 35   | 43   |
| s <sub>DINISO</sub> | 8    | 10   | 13  | 15   | 16   | 18   | 21   | 27   |