

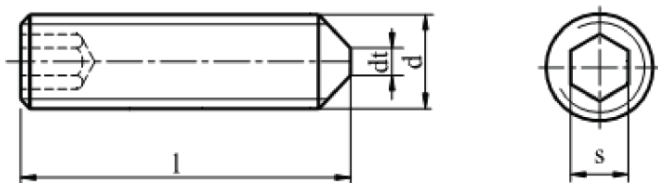


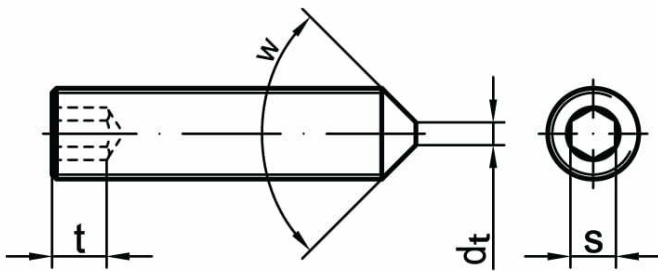

# Hex socket set screws with cone point DIN 914

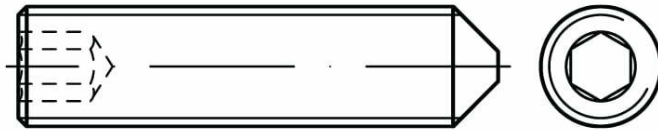

| STANDARD                        | MATERIAL        | CLASS | COATING         |
|---------------------------------|-----------------|-------|-----------------|
| DIN 914<br>PN 82315<br>ISO 4027 | 45H<br>A2<br>A4 |       | galvanized zinc |

| d                 | M1,6 | M2  | M2,5 | M3   | M4   | M5   |
|-------------------|------|-----|------|------|------|------|
| d <sub>tmax</sub> | 0,4  | 0,5 | 0,65 | 0,75 | 1,00 | 1,25 |
| s                 | 0,7  | 0,9 | 1,3  | 1,5  | 2,0  | 2,5  |

| d                 | M6  | M8 | M10 | M12 | M16 | M20 |
|-------------------|-----|----|-----|-----|-----|-----|
| d <sub>tmax</sub> | 1,5 | 2  | 2,5 | 3   | 4   | 5   |
| s                 | 3   | 4  | 5   | 6   | 8   | 10  |