

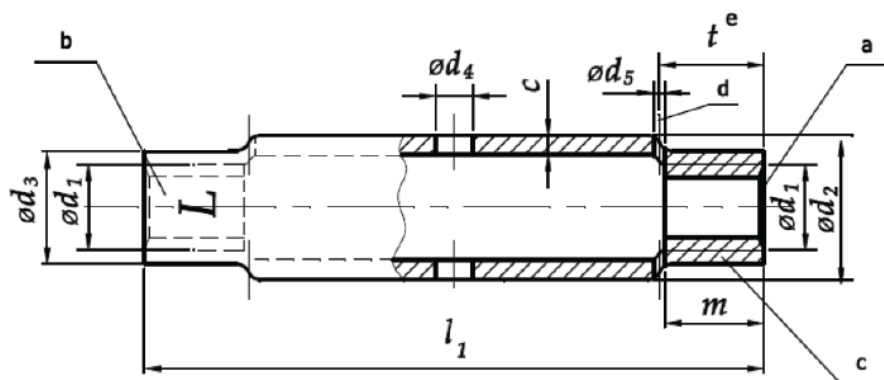


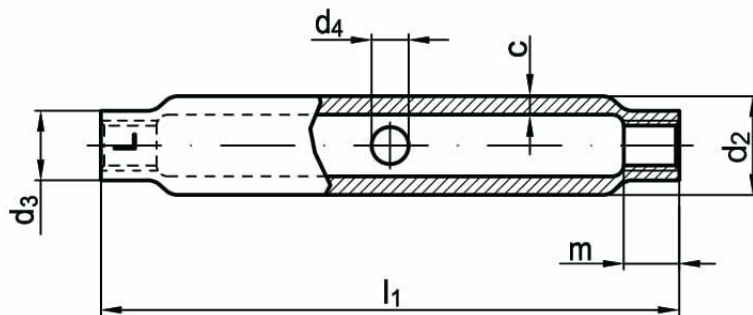

# Turnbuckle frame DIN 1478

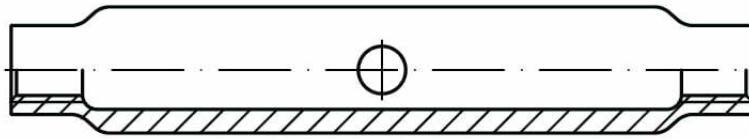

| STANDARD             | MATERIAL                 | CLASS | COATING                                    |
|----------------------|--------------------------|-------|--------------------------------------------|
| DIN 1478<br>PN 82268 | S235<br>S355<br>A2<br>A4 |       | galvanized zinc<br>hot-dip galvanized zinc |

TURNBUCKLE FRAME WITH STUBS DIN 1478  
TURNBUCKLE FRAME DIN 1478

| d                   | M6   | M8   | M10  | M12  | M16  | M20  | M24  | M30 | M36  |
|---------------------|------|------|------|------|------|------|------|-----|------|
| d <sub>2</sub>      | 17,2 | 17,2 | 21,3 | 25,0 | 30,0 | 33,7 | 42,4 | 51  | 63,5 |
| d <sub>3</sub>      | 9    | 12   | 15   | 18   | 22,5 | 27   | 32   | 38  | 47,5 |
| D                   | 6    | 8    | 8    | 10   | 10   | 12   | 12   | 16  | 16   |
| c                   | 2,9  | 3,6  | 4    | 4    | 4,5  | 5    | 5,6  | 6,3 | 8    |
| l <sub>1</sub>      | 110  | 110  | 125  | 125  | 170  | 200  | 255  | 255 | 295  |
| m                   | 7,5  | 10   | 12   | 15   | 20   | 24   | 29   | 36  | 43   |
| range<br>tensioning | 90   | 85   | 95   | 90   | 120  | 140  | 180  | 160 | 180  |