




## Self-drilling screws with wafer head

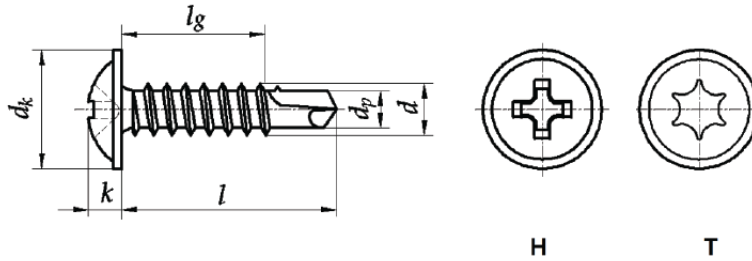

| STANDARD     | MATERIAL | CLASS | COATING |
|--------------|----------|-------|---------|
| ~ DIN 7504 T |          |       |         |

| d <sub>1</sub>    |       | 4,2  |
|-------------------|-------|------|
| d <sub>k</sub>    | max   | 11,2 |
|                   | min   | 10,2 |
| k                 | ≈     | 3,0  |
| d <sub>p</sub>    | ≈     | 3,5  |
| Drilling capacity | from  | 1,75 |
|                   | up to | 3,0  |
| H                 |       | 2    |
| T                 |       | 20   |

| l  | l <sub>g</sub> |
|----|----------------|
| 13 | 4,3            |
| 16 | 7,3            |
| 19 | 10,3           |
| 25 | 16,3           |
| 32 | 23             |

H – cross recess Phillips  
T – hexalobular socket Torx