




Kołki z karami zbieżnymi na całej długości ISO 8744, DIN 1471,
PN 85025

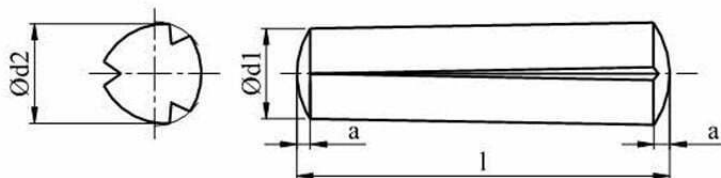

NORMA	MATERIAŁ	KLASA	POWŁOKA
ISO 8744 DIN 1471 PN 85025	stal A1 A2 mosiądz aluminium poliamid		cynk galwaniczny niklowanie

d _i	nom.	1,5	2	2,5	3	4	5	6	8	10	12	16	20	25
	tol.	h9				h11								
α ≈		0,2	0,25	0,3	0,4	0,5	0,63	0,8	1	1,2	1,6	2	2,5	3
l	d ₂ po odkształceniu d ₂ expanded diameter													
8	1,63			2,7	3,25	4,3	5,3							
10														
12														
14	1,6				2,15	3,3	4,35	5,35	8,35	10,4	12,4			
16														
18														
20		2,65	3,25	6,35					8,4	16,55				
22														
24														
26	3,2				6,3	8,35	16,6	20,6		25,6				
28														
30														
32		4,3	5,3	10,45			12,45							
35														
40														
45	4,25			5,25	10,4	12,4								
50														
55														
60		6,25	8,3		10,4	12,4								
65														
70														
75	8,25			10,35	12,3									
80														
85														
90		10,3	16,5											
95														
100														
120														

d	1,5	2	2,5	3	4
d ₂ ¹	1,60 – 1,63	2,10 – 2,15	2,60 – 2,70	3,20 – 3,30	4,15 – 4,30
c	0,2	0,25	0,3	0,4	0,5
wytrzymałość wg ISO	1,6	2,84	4,4	6,4	11,3
wytrzymałość ² wg DIN	1,6	2,85	4,25	6,15	10,6
d	5	6	8	10	12
d ₂ ¹	5,15 – 5,30	6,15 – 6,35	8,20 – 8,40	10,20 – 10,45	12,25 – 12,50
c	0,63	0,85	1	1,2	1,6
wytrzymałość wg ISO	17,6	25,4	45,2	70,4	101,8
wytrzymałość ² wg DIN	16,5	22,8	40,5	63,2	91
¹ Ø zależy od długości					
² minimalna siła ścinająca, podwójna kN					