



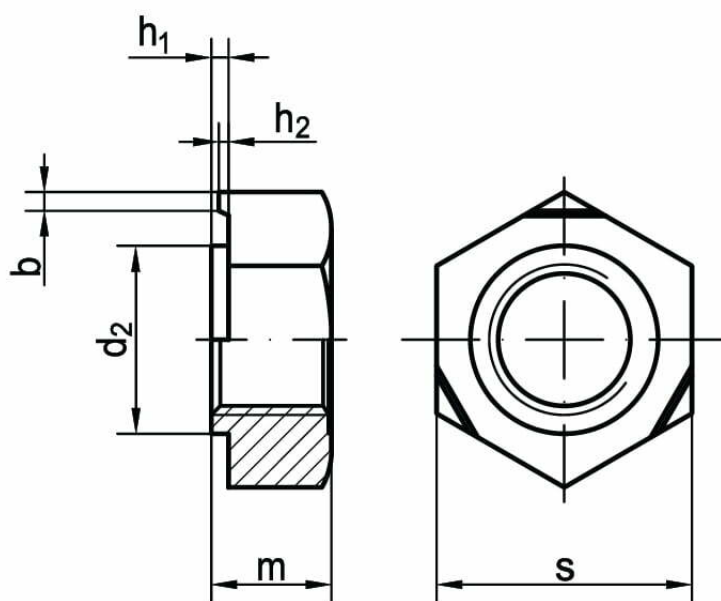

# Nakrętki sześciokątne do zgrzewania DIN 929, PN 82169

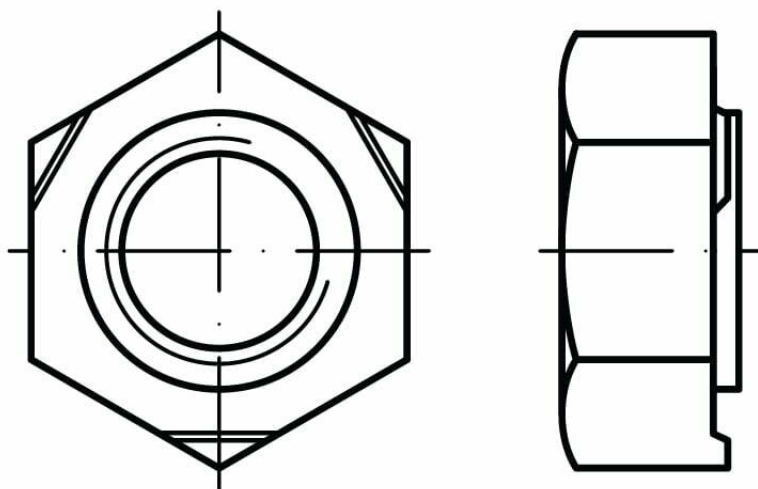

| NORMA               | MATERIAŁ         | KLASA | POWŁOKA |
|---------------------|------------------|-------|---------|
| DIN 929<br>PN 82169 | stal<br>A2<br>A4 |       |         |

| d                  | M3   | M4   | M5  | M6   | M8   | M10  | M12  | M14  | M16  |
|--------------------|------|------|-----|------|------|------|------|------|------|
| d <sub>2</sub>     | 4,5  | 6    | 7   | 8    | 10,5 | 12,5 | 14,8 | 16,8 | 18,8 |
| h <sub>1 max</sub> | 0,55 | 0,65 | 0,7 | 0,75 | 0,9  | 1,15 | 1,4  | 1,8  | 1,8  |
| h <sub>2 max</sub> | 0,25 | 0,35 | 0,4 | 0,4  | 0,5  | 0,65 | 0,8  | 1,0  | 1,0  |
| m                  | 3    | 3,5  | 4   | 5    | 6,5  | 8    | 10   | 11   | 13   |
| s                  | 7,5  | 9    | 10  | 11   | 14   | 17   | 19   | 22   | 24   |