




Nitonakrętki z trzpieniem cylindrycznym z kołnierzem walcowym

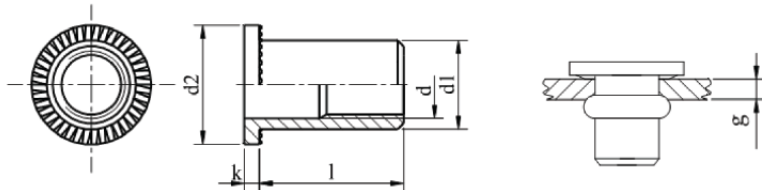

NORMA	MATERIAŁ	KLASA	POWŁOKA
	stal węglowa aluminium stal nierdzewna		ocynk galwaniczny

	stal nierdzewna				stal węglowa
d_{nom}	M4	M5	M6	M8	M8
d_1	6	7	9	11	11
d_2	9	10	13	15	15
k	1	1	1,5	1,5	1,5
l	10	12	14,5	16	16,5
e^*	0,25 – 2,00	0,50 – 3,00	0,50 – 3,00	0,50 – 3,00	0,50 – 3,0
*	6,1	7,1	9,1	11,1	11,1

	aluminium			
d_{nom}	M4	M5	M6	M8
d_1	6	7	9	11
d_2	9	10	13	15
k	1	1	1,5	1,5
l	9,5	12	14,5	16,5
e^*	0,25 – 3,0	0,50 – 2,50	1,00 – 3,00	3,00 – 5,50
*	6,1	7,1	9,1	11,1