



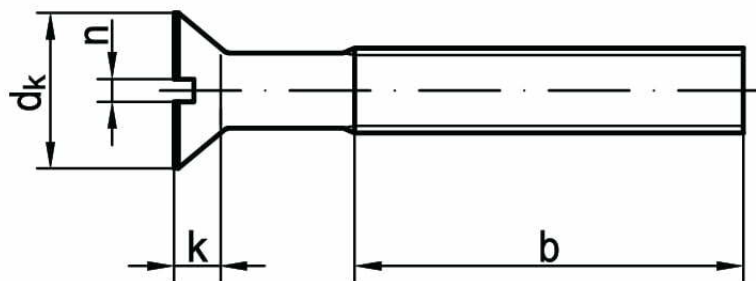

Wkręty z łbem stożkowym z rowkiem DIN 963, PN 82207, ISO 2009

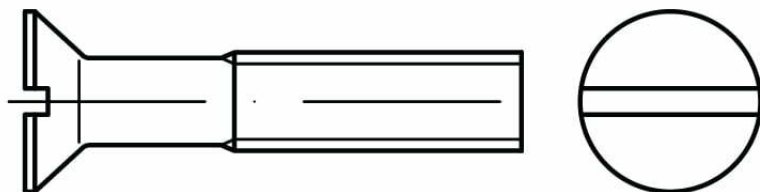

NORMA	MATERIAŁ	KLASA	POWŁOKA
DIN 963 PN 82207 ISO 2009	stal A1 A2 A4 mosiądz aluminium	4.8 5.8 8.8	cynk galwaniczny cynk-nikiel

d	M1	M1,2	M1,4	M1,6	M1,8	M2	M2,5	M3
d _k	1,9	2,3	2,6	3,0	3,4	3,8	4,7	5,6
k	0,6	0,72	0,84	0,96	1,08	1,2	1,5	1,65
b	*	*	*	15	15	16	18	19
n	0,25	0,3	0,3	0,4	0,4	0,5	0,6	0,8
* – gwint do głowy								
d	M4	M5	M6	M8	M10	M12	M16	
d _k	7,5	9,2	11	14,5	18	22	29	
k	2,2	2,5	3	4	5	6	8	
b	22	25	28	34	40	46	58	
n	1	1,2	1,6	2	2,5	3	4	