




## Wkręty do drewna z łbem sześciokątnym DIN 571, PN 82501

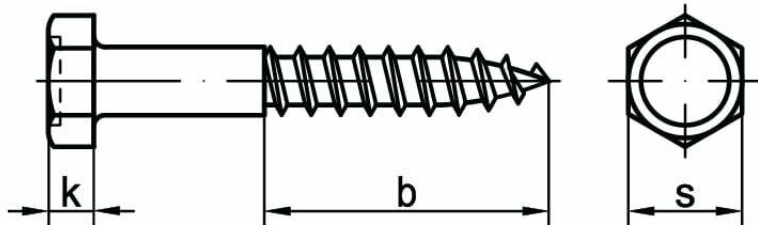

| NORMA               | MATERIAŁ                    | KLASA | POWŁOKA                                                                     |
|---------------------|-----------------------------|-------|-----------------------------------------------------------------------------|
| DIN 571<br>PN 82501 | stal<br>A2<br>A4<br>mosiądz |       | cynk galwaniczny<br>cynk ogniowy<br>cynk termodyfuzyjny<br>powłoki lamelowe |

| d     |      | 4    | 5    | 6    | (7)   | 8     | 10    | 12    | 16    | 20    |
|-------|------|------|------|------|-------|-------|-------|-------|-------|-------|
| $d_s$ | max  | 4    | 5    | 6    | 7     | 8     | 10    | 12    | 16    | 20    |
|       | min  | 3,52 | 4,52 | 5,52 | 6,42  | 7,42  | 9,42  | 11,3  | 15,3  | 19,3  |
| k     | nom. | 2,8  | 3,5  | 4    | 5     | 5,5   | 7     | 8     | 10    | 13    |
|       | max  | 3,1  | 3,88 | 4,38 | 5,38  | 5,88  | 7,45  | 8,45  | 10,45 | 13,90 |
|       | min  | 2,5  | 3,13 | 3,63 | 4,63  | 5,13  | 6,55  | 7,55  | 9,55  | 12,1  |
| s     | nom. | 7    | 8    | 10   | 12    | 13    | 17    | 19    | 24    | 30    |
|       | max  | 7    | 8    | 10   | 12    | 13    | 17    | 19    | 24    | 30    |
|       | min  | 6,64 | 7,64 | 9,64 | 11,57 | 12,57 | 16,57 | 18,48 | 23,16 | 29,16 |