



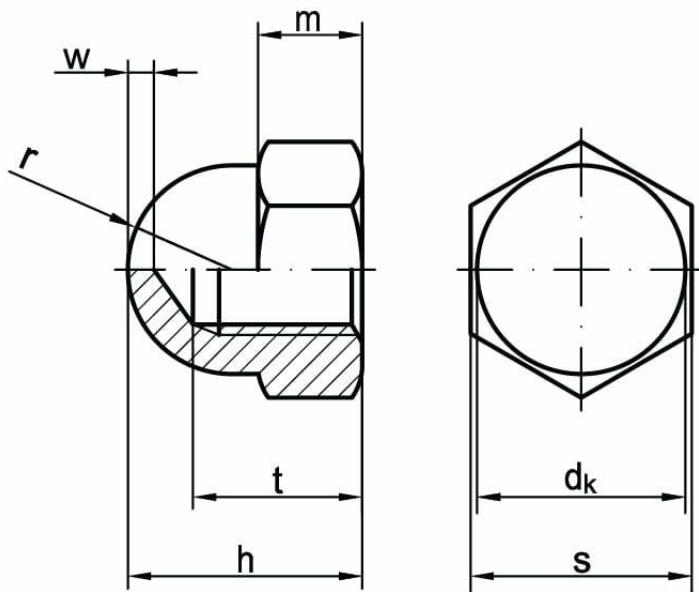

# Hexagon domed cap nuts DIN 1587

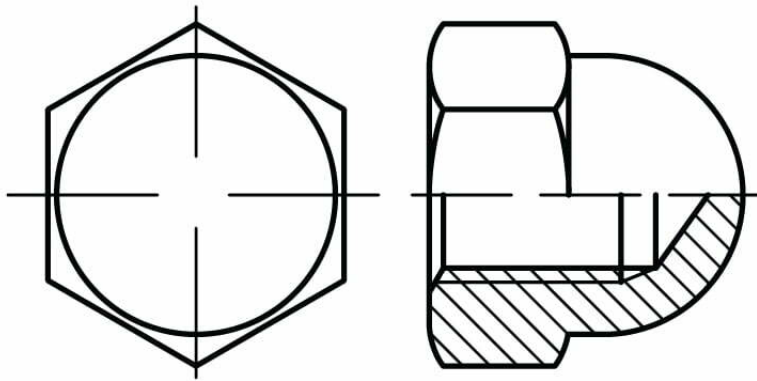

| STANDARD             | MATERIAL                   | CLASS  | COATING                        |
|----------------------|----------------------------|--------|--------------------------------|
| DIN 1587<br>PN 82181 | steel<br>A2<br>A4<br>brass | 6<br>8 | galvanized zinc<br>zinc-nickel |

| d              | M3  | M4   | M5   | M6   | M8    | M10   | M12   | M14   |
|----------------|-----|------|------|------|-------|-------|-------|-------|
| d <sub>k</sub> | 5,8 | 6,5  | 7,5  | 9,5  | 12,5  | 15    | 17    | 20    |
| h              | 5,5 | 8    | 10   | 12   | 15    | 18    | 22    | 25    |
| m              | 2,4 | 3,2  | 4    | 5    | 6,5   | 8     | 10    | 11    |
| s              | 5,5 | 7    | 8    | 10   | 13    | 17    | 19    | 22    |
| t              | 4,5 | 5,26 | 7,21 | 7,71 | 10,65 | 12,65 | 15,65 | 17,65 |
| w              | 2   | 2    | 2    | 2    | 2     | 2     | 3     | 4     |

| d              | M16   | M18   | M20   | M22   | M24  | M27 | M30 |  |
|----------------|-------|-------|-------|-------|------|-----|-----|--|
| d <sub>k</sub> | 23    | 26    | 28    | 33    | 34   | 39  | 44  |  |
| h              | 28    | 32    | 34    | 39    | 42   | 46  | 50  |  |
| m              | 13    | 15    | 16    | 18    | 19   | 22  | 24  |  |
| s              | 24    | 27    | 30    | 34    | 36   | 41  | 46  |  |
| t              | 20,58 | 24,58 | 25,58 | 28,58 | 30,5 | 35  | 39  |  |
| w              | 4     | 5     | 5     | 5     | 6    | 7   | 7   |  |